

IP Network Camera


2MP HD급, 고 해상도 영상 지원

3.6mm Fixed lens , 선명한 화질과 가시각도

IP68방수등급, 최대수심 1,000M 사용가능

내구성이 우수한 BRASS housing 적용

Wet-mate connector

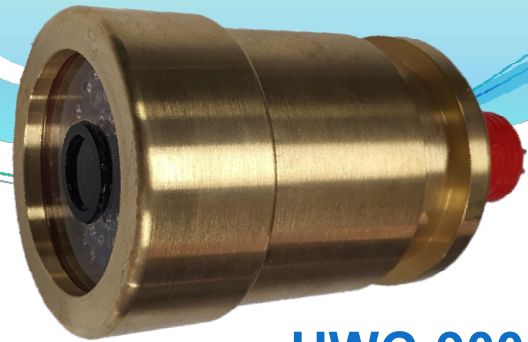

UWC-9000

Sensor	Color 1/2.8 " SONY Sensor
Resolution	1920*1080 30fps (2.1Mega Pixel)
Interface	1 Fast Ethernet RJ-45 (10/1000Mbps) / Onvif Support
Depth rating	1,000M / IP68
Sensitivity	Color 0.2Lux @50IRE/F1.2/3100K BW 0.0005Lux@50IRE / AGC:10
Lens	3.6mm Fixed Mega Pixel Lens
IR LED Light	Built-in IR LED 48ea
Housing material	BRASS
Video	H.264(MEGA4 AVC/MJEP / 30fps@1080P
Camera Functions	WDR:LOW/MIDDLE/HIGH
	BLC :OFF / ON, HLC:LEVEL(0~20) / COLOR
	AGC:0~10, ACE & dnr :OFF / LOW / MIDDLE / HIGH
	DSS: OFF / AUTO / x2 / x4 / x8 / x16 / x32
	Sharpness: 0~10, Mirror: Horizontal / Vertical
	White Balance: AUTO / AUTOext / PRESET / MANUAL
	Electric Shutter: INDOOR / OUTDOOR / INDOOR-ANTI BLUR / OUTDOOR-ANTI BLUR / MANUAL (1/30~1/30000 / 12steps)
Dimension	ø80 x 153mm
Power	DC 12V(± 10%), 1A
Power Consumption	IR OFF : 150mA (MAX) / IR ON : 500mA (MAX)
Operating Temperature	32° - 122° F (0° - 50° C); storage: -4° - 140° F (-20° - 60° C)
Connectors	Wet mate Plug-in type
*# 사양 및 디자인은 사전 통보 없이 변경될 수 있습니다.	